


## Ball lock pin T type

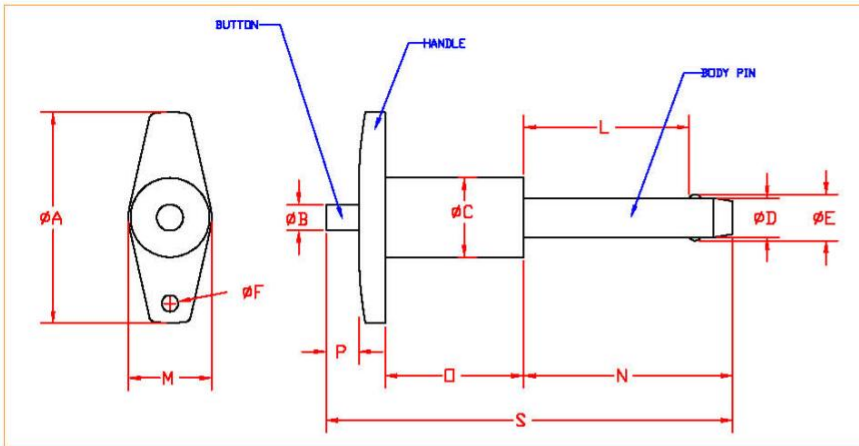

**BODY PIN** STAINLESS STEEL AISI 630 (17-4 PH)  
**HANDLE** EN-AW 6061-T6/T651 - ANODIZING  
**BUTTON** EN-AW 6061-T6/T651 - ANODIZING  
**BALL** STAINLESS STEEL AISI 420 / AISI 440


OPTICLICK is a registered trademark of OPTIK TORNA

PART NUMBER	D	L	A	B	C	E	F	M	N	O	P	S
OPT-TH-06025-DSS	6	25	32	4	12	7	2,5	12,7	32	21	5	61,5
OPT-TH-06030-DSS	6	30	32	4	12	7	2,5	12,7	37	21	5	66,5
OPT-TH-06050-DSS	6	50	32	4	12	7	2,5	12,7	57	21	5	86,5
OPT-TH-06070-DSS	6	70	32	4	12	7	2,5	12,7	77	21	5	106,5
OPT-TH-07025-DSS	7	25	32	5	12	8	2,5	12,7	32	21	5	61,5
OPT-TH-07030-DSS	7	30	32	5	12	8	2,5	12,7	37	21	5	66,5
OPT-TH-07050-DSS	7	50	32	5	12	8	2,5	12,7	57	21	5	86,5
OPT-TH-07070-DSS	7	70	32	5	12	8	2,5	12,7	77	21	5	106,5
OPT-TH-08025-DSS	8	25	32	6	12	9	2,5	12,7	32	21	5	61,5
OPT-TH-08030-DSS	8	30	32	6	12	9	2,5	12,7	37	21	5	66,5
OPT-TH-08050-DSS	8	50	32	6	12	9	2,5	12,7	57	21	5	86,5
OPT-TH-08075-DSS	8	75	32	6	12	9	2,5	12,7	82	21	5	111,5
OPT-TH-08100-DSS	8	100	32	6	12	9	2,5	12,7	107	21	5	136,5
OPT-TH-10040-DSS	10	40	35	8	15	12	3	16	47	21	5	76,5
OPT-TH-10050-DSS	10	50	35	8	15	12	3	16	57	21	5	86,5
OPT-TH-10075-DSS	10	75	35	8	15	12	3	16	82	21	5	111,5
OPT-TH-10100-DSS	10	100	35	8	15	12	3	16	107	21	5	136,5
OPT-TH-10120-DSS	10	120	35	8	15	12	3	16	127	21	5	156,5
OPT-TH-12040-DSS	12	40	35	8	15	14	3	16	47	21	5	76,5
OPT-TH-12050-DSS	12	50	35	8	15	14	3	16	57	21	5	86,5
OPT-TH-12075-DSS	12	75	35	8	15	14	3	16	82	21	5	111,5
OPT-TH-12100-DSS	12	100	35	8	15	14	3	16	107	21	5	136,5
OPT-TH-12120-DSS	12	120	35	8	15	14	3	16	127	21	5	156,5
OPT-TH-15050-DSS	15	50	40	8	20	17	4	22	58	25	7	95
OPT-TH-15075-DSS	15	75	40	8	20	17	4	22	83	25	7	120
OPT-TH-15100-DSS	15	100	40	8	20	17	4	22	108	25	7	145
OPT-TH-15120-DSS	15	120	40	8	20	17	4	22	128	25	7	165
OPT-TH-16050-DSS	16	50	40	8	20	18	4	22	58	25	7	95
OPT-TH-16075-DSS	16	75	40	8	20	18	4	22	83	25	7	120
OPT-TH-16100-DSS	16	100	40	8	20	18	4	22	108	25	7	145
OPT-TH-16120-DSS	16	120	40	8	20	18	4	22	128	25	7	165
OPT-TH-20050-DSS	20	50	50	10	30	24	4	35	60	25	10	100
OPT-TH-20075-DSS	20	75	50	10	30	24	4	35	85	25	10	125
OPT-TH-20100-DSS	20	100	50	10	30	24	4	35	110	25	10	150
OPT-TH-20120-DSS	20	120	50	10	30	24	4	35	130	25	10	170
OPT-TH-20150-DSS	20	150	50	10	30	24	4	35	160	25	10	200

Dimensions are in millimeters.

# OPTICLICK

## Pin Retaining Cable

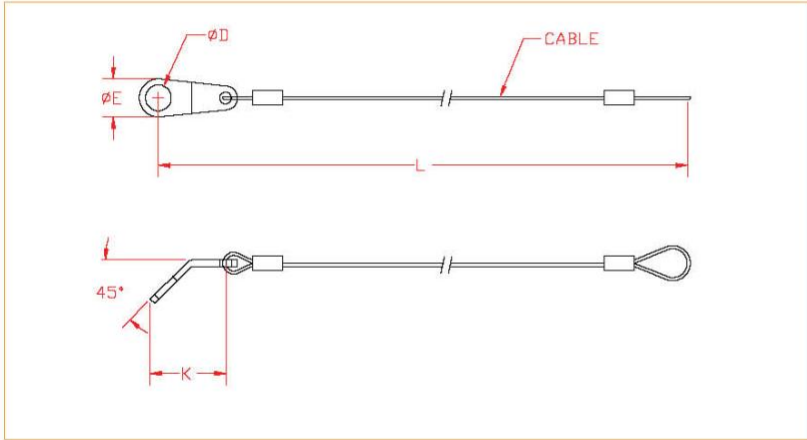

PART NUMBER	D	L	E	K	CABLE DIAMETER
OPT-L-03150-SS	Ø3.2	150	Ø6.2	15	WIRE Ø1 , WITH PVC Ø2
OPT-L-03200-SS	Ø3.2	200	Ø6.2	15	WIRE Ø1 , WITH PVC Ø2
OPT-L-03250-SS	Ø3.2	250	Ø6.2	15	WIRE Ø1 , WITH PVC Ø2
OPT-L-03300-SS	Ø3.2	300	Ø6.2	15	WIRE Ø1 , WITH PVC Ø2
OPT-L-03400-SS	Ø3.2	400	Ø6.2	15	WIRE Ø1 , WITH PVC Ø2
OPT-L-03500-SS	Ø3.2	500	Ø6.2	15	WIRE Ø1 , WITH PVC Ø2
OPT-L-04300-SS	Ø4.2	300	Ø7.2	15	WIRE Ø1 , WITH PVC Ø2
OPT-L-04400-SS	Ø4.2	400	Ø7.2	15	WIRE Ø1 , WITH PVC Ø2
OPT-L-04500-SS	Ø4.2	500	Ø7.2	15	WIRE Ø1 , WITH PVC Ø2
OPT-L-05250-SS	Ø5.2	250	Ø9	20	WIRE Ø2 , WITH PVC Ø3
OPT-L-05400-SS	Ø5.2	400	Ø9	20	WIRE Ø2 , WITH PVC Ø3
OPT-L-05500-SS	Ø5.2	500	Ø9	20	WIRE Ø2 , WITH PVC Ø3
OPT-L-06250-SS	Ø6.5	250	Ø11	25	WIRE Ø2 , WITH PVC Ø3
OPT-L-06400-SS	Ø6.5	400	Ø11	25	WIRE Ø2 , WITH PVC Ø3
OPT-L-06500-SS	Ø6.5	500	Ø11	25	WIRE Ø2 , WITH PVC Ø3

Dimensions are in millimeters.

**CABLE** STAINLESS STEEL - PVC COATED

**TAB** STAINLESS STEEL - AISI 304

**RING** STAINLESS STEEL - AISI 304

OPTICLICK is a registered trademark of OPTIK TORNA